


**NYCON-XL-200**  
**Monofilament, Polyolefin, Large Denier, High-Tensile Macro Fiber**

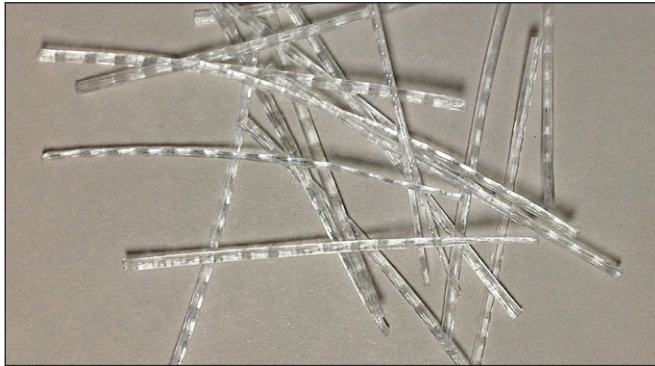

Nycon-XL-200 monofilament high-tensile macro fibers are a high-dose fiber for post-crack strength in precast, cast-in-place and shotcrete.

**NYCON-XL-200 Physical Properties**

Base Resin	Modified Olefin
Fiber Length	1.9" (48 mm)
Specific Gravity	0.91
Tensile Strength	80 ksi (550 MPa)
Young's Modulus	1160 ksi (8.0 GPa)
Surface Texture	Embossed
Melting Point	320° F (160° C)
Ignition Point	840° F (450° C)
Color	Natural
Fiber Count	62,500 fibers / kg
Water Absorption	Nil
Alkali Resistance	Excellent
Concrete Surface	Commercial
Corrosion Resistance	High

**Description**

NYCON-XL-200 fiber products are monofilament, high-performance, high-tensile macro fibers for use in fiber reinforced concrete and shotcrete. NYCON-XL-200 is specifically designed for use in concrete products for the purpose of controlling post crack issues.

*NYCON-XL-200 meets the requirements of ASTM C-1116, Section 4.1.3 and ASTM C-1399.*

**Applications**

NYCON-XL-200 utilizes the mixing activity to disperse the fibers into the mix. NYCON-XL-200 acts with surface bond in the concrete with a multi-dimensional, fiber network. NYCON-XL-200 does not affect curing process chemically.

NYCON-XL-200 can be used in all types of concrete.

NYCON-XL-200 used in shotcrete applications will increase the compaction and density of shotcrete, reducing rebound and permitting thicker layers per pass.

# NYCON-XL-200

## Monofilament, Polyolefin, Large Denier, High-Tensile Macro Fiber



<b>Advantages/Benefits</b>	<ul style="list-style-type: none"><li>• Mechanical bond with the concrete</li><li>• Improves post-crack strength</li><li>• Provides multi-dimensional reinforcement</li><li>• Enhances durability and toughness of concrete</li></ul>
<b>Mixing</b>	NYCON-XL-200 can be added directly to the mixing system during or after the batching of the ingredients and mixed at high speed for a minimum of five minutes. Additional mixing does not adversely affect the distribution or overall performance of NYCON-XL-200. The addition of NYCON-XL-200 at the normal recommended dosage rate (3-10 lb/cy) does not require any mix design or application changes. A water reducer or super-plasticizer is recommended in concrete products where improved workability and finishability are desired.
<b>Tooling &amp; Finishing</b>	Fiber reinforced concrete can be finished by most finishing techniques. NYCON-XL-200 does not affect the finishing characteristics of concrete. NYCON-XL-200 can be used in power/hand troweled concrete, colored and broom finished concrete.  NYCON-XL-200 can be pumped and placed using conventional equipment. Hand screeds can be used, but vibratory and laser screeds are recommended to provide added compaction and bury surface fibers.
<b>Packaging</b>	Nycon-XL-200 fibers are packaged in (33) 11 lb (5.0 kg) bags per gaylord, 363 lbs (165 kg) per gaylord. Other packaging available.
<b>Storage and Shelf Life</b>	NYCON-XL-200 should be stored in dry warehouse. Protect product from the rain.

**KEEP CONTAINER TIGHTLY CLOSED - KEEP OUT OF REACH OF CHILDREN - NOT FOR INTERNAL CONSUMPTION - FOR INDUSTRIAL USE ONLY**

All information provided by Nycon Corporation concerning Nycon products, including but not limited to, any recommendations and advice relating to the application and use of Nycon products, is given in good faith based on Nycon's current experience and knowledge of its products when properly stored, handled and applied under normal conditions in accordance with Nycon's instructions. In practice, the differences in materials, substrates, storage and handling conditions, actual site conditions and other factors outside of Nycon's control are such that Nycon assumes no liability for the provision of such information, advice, recommendations or instructions related to its products, nor shall any legal relationship be created by or arise from the provision of such information, advice, recommendations or instructions related to its products. The user of the Nycon product(s) must test the product(s) for suitability for the intended application and purpose before proceeding with the full application of the product(s).

Nycon reserves the right to change the properties of its products without notice. All sales of Nycon product(s) are subject to its current terms and conditions of sale which are available at [www.nycon.com](http://www.nycon.com) or by calling 800-456-9266.

Prior to each use of any Nycon product, the user must always read and follow the warnings and instructions on the product's most current Technical Data Sheet, product label and Material Safety Data Sheet which are available. Nothing contained in any Nycon materials relieves the user of the obligation to read and follow the warnings and instruction for each Nycon product as set forth in the current Product Data Sheet, product label and Material Safety Data Sheet prior to product use.

Nycon warrants this product for one year from date of shipment to be free from manufacturing defects and to meet the technical properties on the current Product Data Sheet if used as directed within shelf life. User determines suitability of product for intended use and assumes all risks. Buyer's sole remedy shall be limited to the purchase price or replacement of product exclusive of labor or cost of labor.

NO OTHER WARRANTIES EXPRESS OR IMPLIED SHALL APPLY INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Nycon SHALL NOT BE LIABLE UNDER ANY LEGAL THEORY FOR SPECIAL OR CONSEQUENTIAL DAMAGES. Nycon SHALL NOT BE RESPONSIBLE FOR THE USE OF THIS PRODUCT IN A MANNER TO INFRINGE ON ANY PATENT OR ANY OTHER INTELLECTUAL PROPERTY RIGHTS HELD BY OTHERS.

<b>800-456-9266</b>	<b><a href="http://www.nycon.com">www.nycon.com</a></b>	<b><a href="mailto:sales@nycon.com">sales@nycon.com</a></b>
---------------------	---	---